



BE-1330KB

3D Joystick Coax-con Keyboard for BE-1806i & BE-6060CV




- Connect single Coaxial cable from Speed Dome Camera to BE-1330KB and control all the PTZ features. (Connect Video O/p to monitor)
- Data Cable not required from Camera to connect RS485
- Saves data Cable cost, carries Video & Data over the same Coaxial cable.
- In case of multiple PTZ Cameras, use **Coax-Con** unit and connect this Keyboard to **Coax-Con** unit thro' a data cable.
- Control the **Coax-Con** vari-focal lens of BE-6060CV with this keyboard.
- Improves signal transportation quality (450m max).
- Simple updation of any standard Dome/IR camera to a Speed Dome Camera without any additional cable/s.

Specifications:

Joystick	3 Axis
Signal System	NTSC/PAL
Video In	1.0Vpp, 75Ω (BNC) 1ch video in
Video Out	1.0Vpp, 75Ω (BNC) 1ch video out
Communication Interface	RS485, BNC (special for Coax-con)
Communication Protocol	Pelco D
Baud Rate	1200,2400,4800,9600
Operation	Keyboard & Joystick
Display	3bit LED
Power	DC12V
Working Temperature	-20°C ~ +50°C



Single *Coax-Con* Camera (*BE-6060CV* & *BE-1806i*) connectivity

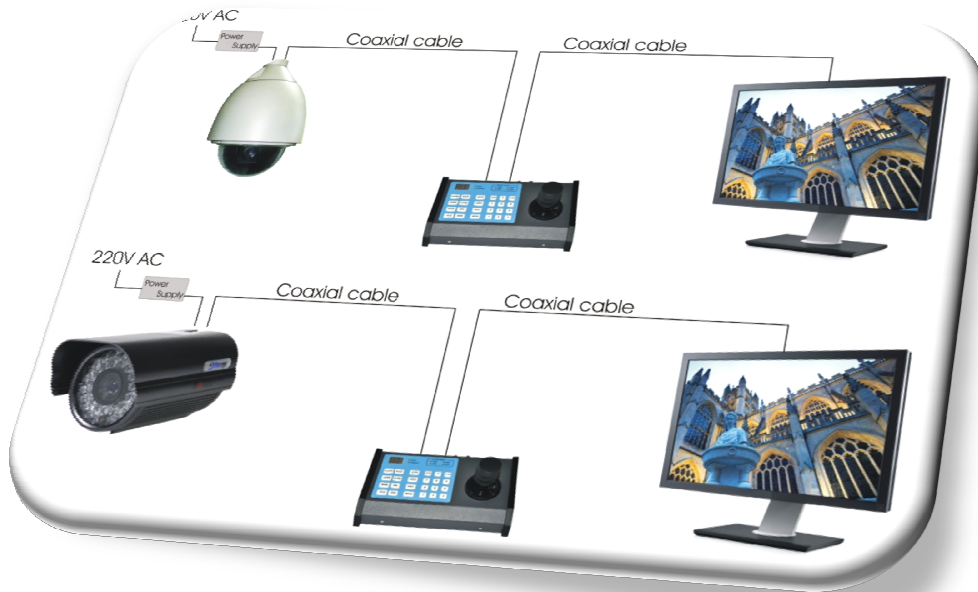

Multiple *Coax-Con* Camera (*BE-6060CV* & *BE-1806i*) connectivity with *Coax-Con* unit.

