


DH-CA-F461CP/N-A

High Resolution Day/Night(ICR) Camera

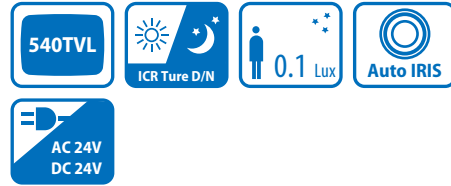


DH-CA-F461CP-A: 540TVL, ICR Day/Night, OSD, PAL
 DH-CA-F461CN-A: 540TVL, ICR Day/Night, OSD, NTSC

Features

- 1/3" SONY Super HAD II CCD
- High resolution of 540TVL(Color), 600TVL(B/W)
- Mini. Illumination of 0.05Lux/F1.2(Color), 0.01Lux/F1.2(B/W)
- ICR true Day/Night
- BLC, AGC, ATM
- High Signal to Noise Ratio (SNR)
- Auto & Manual Electronic Shutter
- Auto Iris (DC or Video driver)
- Powerful OSD setting function
- Support RS-485 control

Dimensions (mm)

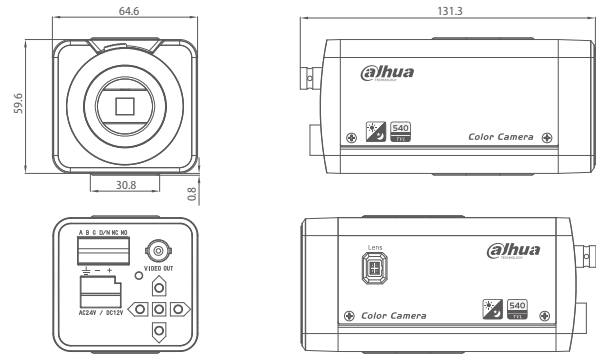

Specifications

Model	DH-CA-F461CP-A	DH-CA-F461CN-A	
Camera	Image Sensor	1/3" SONY Super HAD II CCD	
	Video Format	PAL	NTSC
	Effective Pixels	752(H) x 582(V), 440K pixels	768(H) x 494(V), 380K pixels
	Horizontal Resolution	Color: 540TVL, B/W: 600TVL	
	Mini. Illumination	Color: 0.05Lux/F1.2, B/W: 0.01Lux/F1.2	
	Electronic Shutter	Auto/Manual, 1/50s~1/100,000s	Auto/Manual, 1/60s~1/100,000s
	S/N Ratio	>52dB	
	Synchronization	Internal / Power Synchronization	
Lens	Video Output	1Vp-p Composite Output (75Ω/BNC)	
	Lens Mount	C / CS	
Setting (OSD)	Iris Control	Manual / DC / Video	
	Auto Gain	Off / High / Middle / Low	
	BLC	Backlight Area / Intensity / Off	
	Exposure	Exposure mode / Gain	
	White Balance	Auto / ATW / Manual	
	Day/Night	Auto(ICR) / External / B/W / Color	
	Video Setting	Mirror / Gama / Video signal / Sharpness / Saturation / Definition / Brightness / Negative	
	Advanced	Flicker / Sync / Dead-pixel detection / Privacy masking / RS485 / Manufacturing info	
	Language	English / Chinese	
	General	Communication	RS-485
Power Supply		AC24V±10% / DC12V±10%	
Power Consumption		8W	
Working Temperature		-10°C~+60°C	
Dimension		131.3mm x 64.6mm x 59.6mm	
Weight		480g	