



SAMSUNG

iPOLiS,
Your smart security solution



Technology Get Better 4CIF WDR Network Camera



4CIF WDR Network Fixed Camera

SNB-3002




The SNB-3002 network box camera delivers 4-CIF resolution images with best in class clarity and quality. This camera features Wide Dynamic Range (WDR) technology and is able to tackle challenging lighting conditions making it suitable for areas that have strong light/dark contrasts. The SNB-3002 supports real-time monitoring, high-quality or high efficiency recording, mobile monitoring, E-mail notification and the ability to save to an SD memory card.

- 30(25)fps at 4CIF resolution
- H.264, MPEG-4, MJPEG multiple codec
- Multiple Streaming
- Day and Night Function (ICR)
- PoE, Micro SD Slot, Bi-Directional Audio

4CIF WDR Network Fixed Camera

SNB-3002




Specifications



	SNB-3002N	SNB-3002P
VIDEO		
Imaging Device	1/3" Super HAD PS CCD	
Total Pixels	811(H) x 508(V)	795(H) x 596(V)
Effective Pixels	768(H) x 494(V)	752(H) x 582(V)
Scanning System	Progressive (if WDR on, Interlaced scan)	
Frequency	H : 15.734KHz / V : 59.94Hz	H : 15.625KHz / V : 50Hz
Horizontal Resolution	Color : 600TV lines	
Min. Illumination	Color : 0.4Lux (F1.2, 50IRE), 0.001Lux (Sens-up 512x) B/W : 0.04Lux (F1.2, 50IRE), 0.0001Lux (Sens-up 512x)	
S / N Ratio	52dB	
Video Out	CVBS : 1.0 Vp-p / 75 Ω composite	
LENS		
Lens Type	Manual / DC auto iris	
Mount Type	C / CS	
OPERATIONAL		
Camera Title	Off / On (Displayed up to 15 characters)	
Day & Night	Auto (ICR) / Color / B/W / External B/W	
Backlight Compensation	Off / BLC / WDR	
Wide Dynamic Range	128x, 52dB	160x, 52dB
Contrast Enhancement	SSDR (Samsung Super Dynamic Range) (Off / On)	
Digital Noise Reduction	Motion adaptive 2D+3D noise filter (Off / Low / Middle / High / User)	
Digital Image Stabilization	Off / On	
Motion Detection	Off / On (4 programmable zones)	
Privacy Masking	Off / On (12 polygonal programmable zones, 4 point polygonal method)	
Sens-up (Frame Integration)	Off / Auto (2x ~ 512x)	
Gain Control	AGC (Low / Middle / High)	
White Balance	ATW1 / ATW2 / AWC / 3200K / 5600K	
Electronic Shutter Speed	Off / Auto (1/100 ~ 1/10Ksec)	Off / Auto (1/120 ~ 1/10Ksec)
Flip / Mirror	Off / On	
Profile	Standard / ITS / Backlight / Day & Night / Gaming / Custom	
Intelligent Video Analytics	Tampering	
Alarm I/O	Input 1ea / Output 1ea (Relay)	
Remote Control Interface	RS-485	
RS-485 Protocol	Samsung-T/E, Pelco-P/D, Sungjin	
NETWORK		
Ethernet	RJ-45 (10/100BASE-T)	
Video Compression Format	H.264, MPEG-4, MJPEG	
Resolution	704 x 480, 640 x 480, 352 x 240	704 x 576, 640 x 480, 352 x 288
Max. Framerate	30fps	25fps
Video Quality Adjustment	H.264, MPEG-4 : Compression level, Target bitrate level control MJPEG : Quality level control	
Bitrate Control Method	H.264, MPEG-4 : CBR or VBR, MJPEG : VBR	
Streaming Capability	Multiple streaming (Up to 10 profiles)	
Audio I/O	Mic / Line in, Line out	
Audio Compression Format	G.711 u-law	
Audio Communication	Bi-directional audio	
IP	IPv4, IPv6	
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTSP, NTP, HTTP, HTTPS, SSL, DHCP, PPPoE FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QOS, ONVIF HTTPS(SSL) login authentication, Digest login authentication, IP address filtering, User access log, 802.1x authentication	
Security	Unicast / MulticastChrom, Apple Safari	
Streaming Method	10 users at unicast mode	
Max. User Access	SD/SDHC memory slot	
Memory Slot	Yes	
ONVIF Conformance	Supported OS : Windows XP / VISTA / 7, MAC OS Supported Browser : Internet Explorer 7.0 or Higher, Firefox, Google	
Web Viewer	NET-I viewer	
Central Management Software		
ENVIRONMENTAL		
Operating Temperature / Humidity	-10°C ~ +50°C (+14°F ~ +122°F) / 20% ~ 80% RH	
ELECTRICAL		
Input Voltage / Current	12V DC, 24V AC, PoE (IEEE802.3af)	
Power Consumption	Max. 6W	
MECHANICAL		
Color / Material	Silver / Metal	
Dimension (WxHxD)	72.0 x 60.0 x 136.8mm (2.83" x 2.36" x 5.39")	
Weight	440g (0.97 lb)	

Dimensions

Unit : mm (inch)

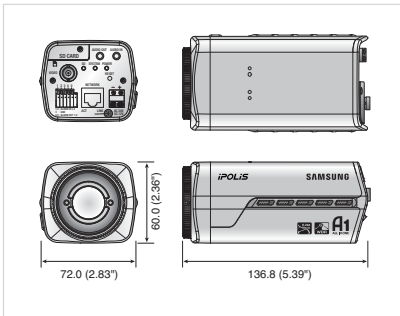

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN AMERICA Inc.
100 Challenger Rd, Suite 700 Ridgely Park, NJ 07660
Toll Free : +1-877-213-1222 Direct : +1-201-325-6920
Fax : +1-201-373-0124
www.samsungc-security.com



The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

■ DISTRIBUTED BY



www.asi.ind.in