

DH-DVR 5804/5808/5816

4/8/16 Channel Entry-level D1 2U Standalone DVR



Features

- > Up to 4/8/16 cameras with 1080p realtime preview
- > H.264 dual-stream video compression
- > Full channel @D1(4CIF) realtime recording
- > HDMI / VGA / TV/Spot simultaneous video output
- > All channel synchronous realtime playback, GRID interface & smart search
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Support 8 SATA HDD up to 32TB, 4 USB2.0

Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

Technical Specifications

Model	DH-DVR5804	DH-DVR5808	DH-DVR5816
System			
Main Processor	Embedded processor		
Operating System	Embedded LINUX		
Video			
Input	4 channel, BNC	8 channel, BNC	16 channel, BNC

DH-DVR 5804/5808/5816


Standard	NTSC(525Line, 60f/s), L(625Line, 50f/s) PA		
Audio			
Input	4 channel, BNC	8 channel, BNC	16 channel, BNC
Output	1 channel, BNC		
Two-way Talk	1 channel Input, 1 channel Output(reuse the output channel), BNC audio		
Display			
Interface	1 HDMI, 1 VGA, 1 TV, 1 Spot, BNC		
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768		
Display Split	1/4	1/4/8/9	1/4/8/9/16
Privacy Masking	4 rectangular zones (each camera)		
OSD	Camera title, Time, Video loss, Camera lock, motion detection, Recording Motion		
Recording			
Video/Audio Compression	H.264 / G.711		
Image Resolution	D1/4CIF(704×576/704×480) / HD1(352×576/352×480) / 2CIF(704×288/704×240) / CIF(352×288/352×240) / QCIF(176×144/176×120)		
Record Rate	Main Stream:	D1/HD1/2CIF/CIF(1~25/30fps)	
	Extra Stream	CIF/QCIF(1~25/30fps)	
Bit Rate	48~4096Kb/s		
Record Mode	Manual, Schedule(Regular(Continuous), MD,), Stop Alarm		
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
Video Detection & Alarm			
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Spot, Buzzer & Screen tips		
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank L		
Alarm Input	4 channel	8 channel	16 channel
Relay Output	3 channel		
Playback & Backup			

DH-DVR 5804/5808/5816

Sync Playback	1/4	1/4/9	1/4/9/16
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search		
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom		
Backup Mode	USB Device / Network		
Network			
Ethernet	RJ-45 port (10/100M/1000M)		
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, Alarm Server		
Max. User Access	20 users		
Smart Phone	iPhone, iPad, Android, Windows Phone		
Storage			
Internal HDD	8 SATA ports(8HDDs or 6HDDs + 1CD/DVD-RW), up to 32TB		
External HDD	1 eSATA port (Max 4 SATA HDDs), up to 16TB		
Auxiliary Interface			
USB Interface	4ports (2 Rear), USB2.0		
RS232	1 port, For PC communication & Keyboard		
RS485	1 port, For PTZ control		
Environmental			
Power Supply	AC100~240V, 50/60Hz		
Power Consumption	25W	30W	40W
Working Environment	-10 ~+55°C / 10~90%RH / 86~106kpa		
Dimension(W×D×H)	2U, 440mm×460mm×89mm		
Weight	6.5KG(without HDD)		

System Connection

DH-DVR 5804/5808/5816

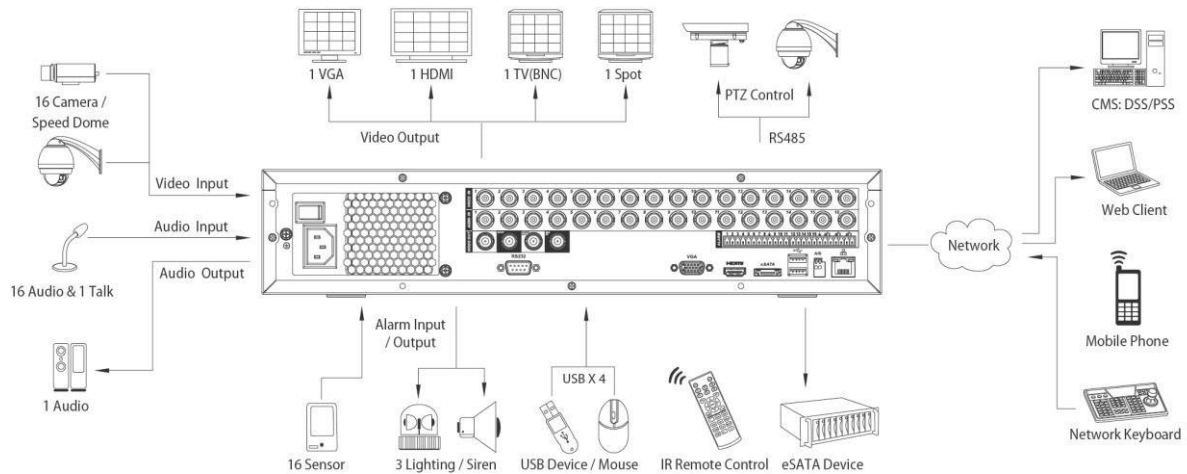

* Take DVR5816 as an example

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815 Email:

overseas@dahuatech.com

www.dahuatechsecurity.com

*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.