


## BE - N9016

H.264, 16Ch 1080P NVR

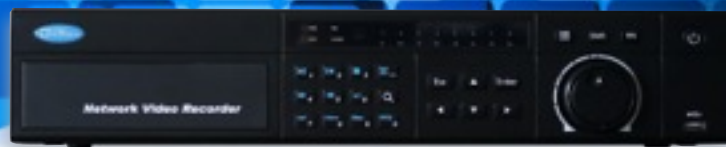

### Specifications :

#### Features :

- H.264 Standalone NVR
- 16ch 1080P real-time video
- 8ch 1080P Sync Playback
- Support Audio Input/Output and Motion detection
- 8 HDD Space and 1 E-Sata port
- Multi-port video output (CVBS, SPOT, VGA, HDMI)
- ONVIF compatible

OS		Embedded Linux
Video & Audio input	Bi-dir Audio	1 CH(Line in,2Vpp,1Kohms)
	IPC Input	up to 32chD1@30fps (2Mbps) <b>-(or)-</b> 22ch 720P@30fps (4Mbps) <b>-(or)-</b> 32ch 720P@15fps(2Mbps) <b>-(or)-</b> 16ch 1080P@30fps (8Mbps) <b>-(or)-</b> 22ch 1080P@15fps (4Mbps)
Video & Audio output	CVBS Output	1CH,BNC(1.0Vp-p,75ohms)
	SPOT Output	1CH,BNC(1.0Vp-p,75ohms)
	VGA	1CH,Resolution 1920×1080, 1440×900, 1280×1024, 1024×768, 800×600
	HDMI	Standard 1.3a Resolution 1920×1080,1440×900, 1280×1024, 1280×720, 1024×768, 800×600
	Audio Output	1CH,BNC(Line out,2Vpp,300ohms)
Video&Audio encoding	Audio Comp.	G711A
	Audio Bit Rate	64Kbps
Video&Audio codecs	IP Resolution	Main stream:up to 5632x4224. Auxiliary stream:4CIF
	Video bitrate	Up to 2Mbps@D1,4Mbps@720P,8Mbps@1080P
	Video decoding	MPEG-4/H.264(Up to High Profile@Level5.0)
	Sync. Playback	Up to 16CH
Other Function	Bidirectional Talk	Two-way voice intercom function
	Motion Detection	Zones: 396(22×18), Sensitivity: 1~6 (level 6 is highest)
	Picture Capture	Local Capture&Web Capture
HDD Interface	SATA	8
	ESATA	1
External Interface	Network Interface	1 RJ45 10M/100M/1000M adaptive Ethernet interface
	USB	2 USB 2.0 Interfaces
	Alarm Input	16CH
	Alarm Output	4CH
	RS-232	1RS-232 interface
	RS-485	1RS-485 interface
General	Dimensions	445x440x89mm(W×D×H)
	Weight	7Kg(without HDD)
	Power Supply	220V±10% 47Hz~63Hz
	Working Temperature	-10°C-- +55°C
	Working Humidity	10%--90%
	Consumption	20W(without HDD)