

High Performance Network Video Recorder



Network Video Recorder

SRN-1000

The SRN-1000 is an intuitive Network Video Recorder that allows you to continuously build upon and develop your new or existing security system into a scalable solution. The SRN-1000 is capable of recording 100Mbps of video bandwidth and up to 64 cameras. It supports a wide range of resolutions from VGA to 5 megapixel in H.264, MPEG4 and MJPEG formats. The SRN-1000 provides maximum flexibility in storage with a built-in 1TB HDD, a maximum of 8 internal HDDs & support for 2 external storage expansion units (SVS-5E). This allows for a maximum attached storage of 48TB per SRN-1000.

- 100Mbps network camera recording
- H.264, MPEG-4 & MJPEG support
- VGA ~ 5 megapixel resolution
- Max. 8 internal HDDs

Network Video Recorder SRN-1000




Specifications

SRN-1000		
DISPLAY		
N/W	Inputs	Up to 64CH
Camera	Resolution	CIF ~ 5M
	Protocols	Onvif (Axis, Sony, Panasonic), Samsung
Live	Multi Screen Display	1 / 4 / 9 / 16, Sequence
PERFORMANCE		
Operating System	Embedded	Linux
Recording	Compression	H.264, MPEG-4, MJPEG
	Recording Bit Rate	100Mbps
	Resolution	CIF ~ 5M
	Mode	Manual, Schedule (Continuous / Event), Event (Pre / Post)
	Event Trigger	Alarm input, Video loss, Camera event (Video analytics)
	Event Action	E-mail, PTZ preset, Alarm buzzer
Search & Playback	Search Mode	Date/time, Event
	Simultaneous Playback	4CH
	Resolution	CIF ~ 5M
Storage	Internal HDD	Up to 8 SATA HDDs
	External (e-SATA Interface)	e-SATA (2 port)
	File Format (Back up)	JPEG, AVI
NETWORK		
Ethernet		RJ-45, Gigabit Ethernet x 2
Protocol Support		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP, PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, UPnP, ONVIF
DDNS		Samsung iPOLiS DDNS
Transmission Speed		Up to 64Mbps
Max. Remote Users		Search 3 / Live unicast 10 / Live multicast 20
IP		IPv4
Security		IP address filtering, User access log, 802.1x authentication
Monitoring		NET-i viewer, Webviewer
INTERFACE		
Audio	Input	64CH (Network)
	Compression	G.711, G.726
Alarm	Input / Output	Terminal 16 inputs (NO/NC), Terminal 4 outputs (Relay), Terminal 1 reset
Connections	Ethernet	2 RJ-45 10/100/1000 Base-T
	eSATA	2 ports
GENERAL		
Electrical	Input Voltage / Current	100 ~ 240V AC ±10%, 50/60Hz, 4 ~ 1.5A
	Power Consumption	Max 45W (154 BTU with 1 HDD), Max 170W (580 BTU with 8 HDD)
Environmental	Operating Temperature	+0°C ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	20% ~ 85% RH
Mechanical	Dimensions (WxHxD)	440.0 x 88.0 x 426.8mm (17.32" x 3.46" x 16.80")
	Weight (1x Hard Disks)	Approx. 6.2Kg (13.67 lb)

Dimensions

Unit : mm (inch)

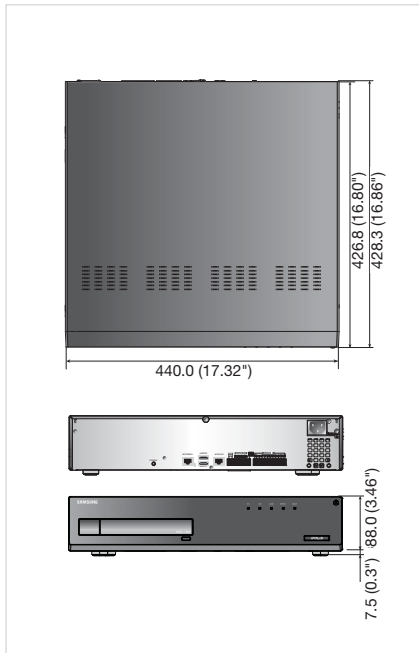

The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN CO., LTD.

701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do Korea 463-400
Tel : +82-70-7147-8741-8749, 8752-8760 Fax : +82-31-8018-3745
www.samsungsecurity.com www.samsungcctv.com

SAMSUNG TECHWIN AMERICA Inc.

100 Challenger Rd, Suite 700 Ridgfield Park, NJ 07660
Toll Free : +1-877-213-1222 Direct : +1-201-325-6320
Fax : +1-201-373-0124
www.samsungcctvusa.com

SAMSUNG TECHWIN EUROPE LTD.

Samsung House, 1000 Hillwood Drive, Hillwood Business Park
Chertsey, Surrey, UNITED KINGDOM KT16 OPS
Tel : +44-1932-45-5300 Fax : +44-1932-45-5325

TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONICS CO., LTD.

No.11 Wei 6 Street, Micro-Electronic Industrial Park
Jingang Road, Tianjin, P.R. CHINA 300385
Tel : +86-22-23887788 Fax : +86-22-23887788

■ DISTRIBUTED BY



www.asi.ind.in