

DH-DVR0404/0804/1604LE-L

4/8/16 Channel Cost-effective 1.5U Standalone DVR



DH-DVR0404LE-L: 4 channel video inputs, 4 channel audio inputs, 4 channel loop outputs and 1 channel matrix output. The 1st video channel can support max D1(4CIF) realtime recording and other channels can support CIF realtime recording. It can support VGA, HDMI, eSATA, USB2.0 and 4 HDDs.


DH-DVR0804LE-L: 8 channel video inputs, 4 channel audio inputs, 8 channel loop outputs and 1 channel matrix output. The 1st video channel can support max D1(4CIF) realtime recording and other channels can support CIF realtime recording. It can support VGA, HDMI, eSATA, USB2.0 and 4 HDDs.

DH-DVR1604LE-L: 16 channel video inputs, 4 channel audio inputs, 16 channel loop outputs and 1 channel matrix output. The 1st and 9th video channels can support max D1(4CIF) realtime recording and other channels can support CIF realtime recording. It can support VGA, HDMI, eSATA, USB2.0 and 4 HDDs.

Features

- 4/8/16 channels cost-effective 1.5U standalone DVR
- Up to 4/8/16 cameras with full HD 1080P display
- H.264 video compression algorithm ideal
- Each channel at CIF and special channel at D1 recording
- Dual encoding streams supported
- TV(BNC)/VGA/HDMI synchronous video output
- Live, recording, playback, backup & remote access
- 16 channel simultaneous playback
- Smart video detection: MD, camera blank, video loss
- 3D intelligent positioning with DAHUA PTZ dome
- Easy backup: USB devices, CD/DVD-RW & network download
- Alarm triggering screen tips, buzzer, PTZ, e-mail, FTP upload
- Up to 4 SATA HDDs & CD/DVD-RW, 1 eSATA, 2 USB2.0
- Built-in web server, multi-DVR client, DMSS & CMS

System Connection

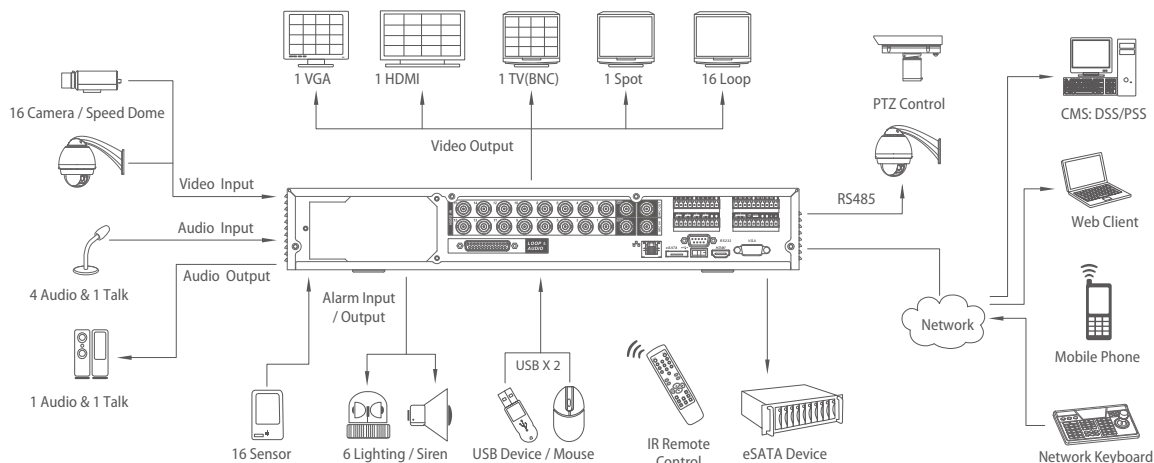

* Take DVR1604LE-L for the example

Specifications

Model		DH-DVR0404LE-L	DH-DVR0804LE-L	DH-DVR1604LE-L	
System	Main Processor	High performance embedded microprocessor			
	Operating System	Embedded LINUX			
	System Resources	Pentaplex function: live, recording, playback, backup & remote access			
	Control Mode	Front panel, USB mouse, IR remote control, Keyboard, Network			
Video	Input	4 channel, BNC(1.0Vp-p, 75Ω)	8 channel, BNC(1.0Vp-p, 75Ω)	16 channel, BNC(1.0Vp-p, 75Ω)	
	Standard	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)			
	Output	1 TV, 1 Spot, BNC(1.0Vp-p, 75Ω), 1 VGA, 1 HDMI			
	Loop Output	4 channel	8 channel	16 channel	
Audio	Input	4 channel, BNC(200-2800mV, 30KΩ)			
	Output	1 channel, BNC(200-3000mV, 5KΩ)			
	Bidirectional Talk	1 channel Input, BNC(200-2800mV, 30KΩ), 1 channel Output, BNC(200-3000mV, 5KΩ)			
Display	Display Split	1/4	1/4/8/9	1/4/8/9/16	
	Resolution	1920×1080, 1280×1024, 1280×720, 1024×768, 800×600			
	Tour Display	Support			
	Privacy Masking	4 self-defined four-sided zones for privacy masking for each camera			
	OSD	Camera title, time, video loss, camera lock, motion detection, recording			
Recording	Video/Audio Compression	H.264 / G.711			
	Image Resolution	D1/4CIF(704×576/704×480) / CIF(352×288/352×240) / QCIF(176×144/176×120)			
	Encoding Speed	Main Stream: Channel 1: D1/CIF/QCIF (1~25/30fps); Channel 2~4: CIF/QCIF (1~25/30fps), D1 (1~6/7fps)	Main Stream: Channel 1: D1/CIF/QCIF (1~25/30fps); Channel 2~8: CIF/QCIF (1~25/30fps), D1 (1~6/7fps)	Main Stream: Channel 1 & 9: D1/CIF/QCIF (1~25/30fps); Others Channel: CIF/QCIF (1~25/30fps), D1 (1~6/7fps)	
	Bit Rate	32~2048Kb/s			
	Image Quality	1~6 level(level 6 is the best, VBR effectively)			
	Recording Mode	Manual, Schedule(Regular(Continuous), MD(Video detection: Motion detection, Camera blank, Video loss), Alarm), Stop			
	Recording Priority	Manual > Alarm > MD > Regular			
	Recording Interval	1~120 min. (default: 60 min.), Pre-record: 1~30 sec., Post-record: 10~300 sec.			
	Video Detection & Alarm	Trigger Events	Recording, PTZ movement, Tour, Alarm, Email, Spot output		
		Motion Detection	Zones: 396(22×18), Sensitivity: 1~6 (level 6 is highest)		
Video Loss & Camera Blank		Support			
Alarm Input		4 channel	8 channel	16 channel	
Relay Output		6 channel			
Playback & Backup	Playback Channel	1/2/4/All			
	Search Mode	Time/Date, Alarm, Motion Detection & Exact search (accurate to second)			
	Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom(any size)			
	Backup Mode	Flash drive/ USB HDD/ USB CD/DVD-RW / eSATA Device / Built-in SATA burner/ Network download			
Network	Ethernet	RJ-45 port (10/100M)			
	Network Functions	TCP/IP, UDP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Email, Alarm Server			
	Remote Operation	Monitor, PTZ control, Playback, System setting, File download, Log information			
Hard Disk	Hard Disk	4 SATA ports, 4 HDDs or 3 HDDs + 1 CD/DVD-RW, Max 2TB per HDD supported			
	Space Occupation	Audio: 28.8MB/H, Video: 56~500MB/H			
	HDD Management	Hard disk hibernation technology, HDD faulty alarm & Raid(Redundancy)			
Auxiliary Interface	USB Interface	2 ports, 1 for mouse control, 1 for backup			
	eSATA	1 port			
	RS232	Dahua keyboard, PC communication			
	RS485	PTZ control			
Environmental	Power Supply	AC 100~240 V, 50/60 Hz			
	Power Consumption	25W	30W	40W	
	Working Environment	-10~+55°C / 10~90%RH / 86~106kpa			
	Dimension	1.5U, 440mm×460mm×68mm(W×D×H)			
	Weight	6.0KG(without HDD)			